



# FLOS




THE GLOWING  
TRACK

Designed by  
Flos Architectural

# Summary

1. — Product
2. — Technical Data
3. — Design
4. — Market

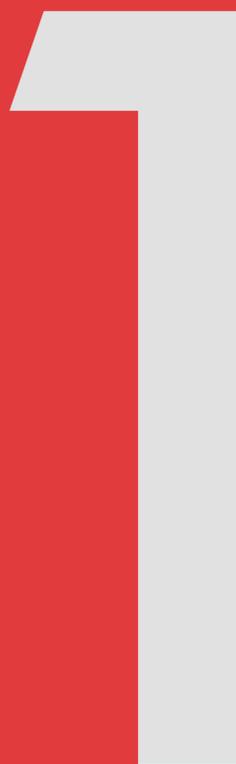

— **Product**

Overview

Models

Sizes

Installation options

Control Options

Finishing

Lighting Fixtures



## Overview

---

Modular and versatile lighting system that combines innovation, high performance and sophisticated design into a single solution.

It offers immersive ambient lighting that integrates harmoniously into the environment, providing homogeneous and balanced illumination.



# Overview

## Models

They come in three models to suit different installation needs and lighting effects.



The Glowing Track



The Glowing Track 360



The Glowing Track Blind





## Models

---

### The Glowing Track

Designed to offer maximum flexibility, this profile pairs the functionality of a hidden track with a sophisticated lateral light distribution that creates a warm and immersive atmosphere.



Equipped with a special multi-ribbed diffuser that provides even, balanced light, it minimizes glare and softens shadows by design.



## Models

---

### The Glowing Track 360

The 360° profile creates cosy and balanced spaces, enhancing the architecture with a soft, pleasant light, ideal for fostering a sense of wellbeing and comfort in any environment.



A 360° light ensures uniform illumination in all directions, eliminating harsh shadows and providing consistent brightness.



## Models

---

### The Glowing Track Blind

Developed for areas where ambient lighting is not required, focusing on accent illumination through spotlights and accent lighting modules that can be installed on the track, providing dynamic solutions to highlight architectural features and emphasize specific areas.



The profile serves as a decorative element thanks to its exclusive range of finishes.



## Sizes

---

All profiles are available in three lengths, with a diameter of just 47mm:

1200 mm



1800 mm



2400 mm



\*600 mm



\*Available only in The Glowing Track 360° Surface Remote Driver, with Casambi control.



# Profile system

---

Profiles are designed with an efficient assembly system that ensures precise and secure connections, ideal for projects requiring versatile and scalable solutions without compromising on quality or aesthetics.





## Installation options

---

The Glowing Track is available in suspended and surface-mounted versions (with or without integrated driver), adaptable to various conditions, making it the ideal choice for any architectural project.



# Installation options

---

## Suspension

The suspended installation offers exceptional design flexibility, with multiple options for managing the driver. You can choose a remote driver kit for a minimalist finish, a surface kit, or a recessed kit with an integrated driver.





# Installation options

## Surface

Surface installation offers the option of an integrated or remote driver. The driver compartment remains out of view thanks to a sleek, unobtrusive design, ensuring the profile appears elegant and compact. Its versatile design enables quick, seamless integration into a variety of settings.



1. REMOTE DRIVER



2. INTEGRATED DRIVER




# Installation options

---

## Vertical

Vertical modules can redefine the aesthetics of an interior, playing with heights and shaping spaces with new immersive lighting atmospheres.

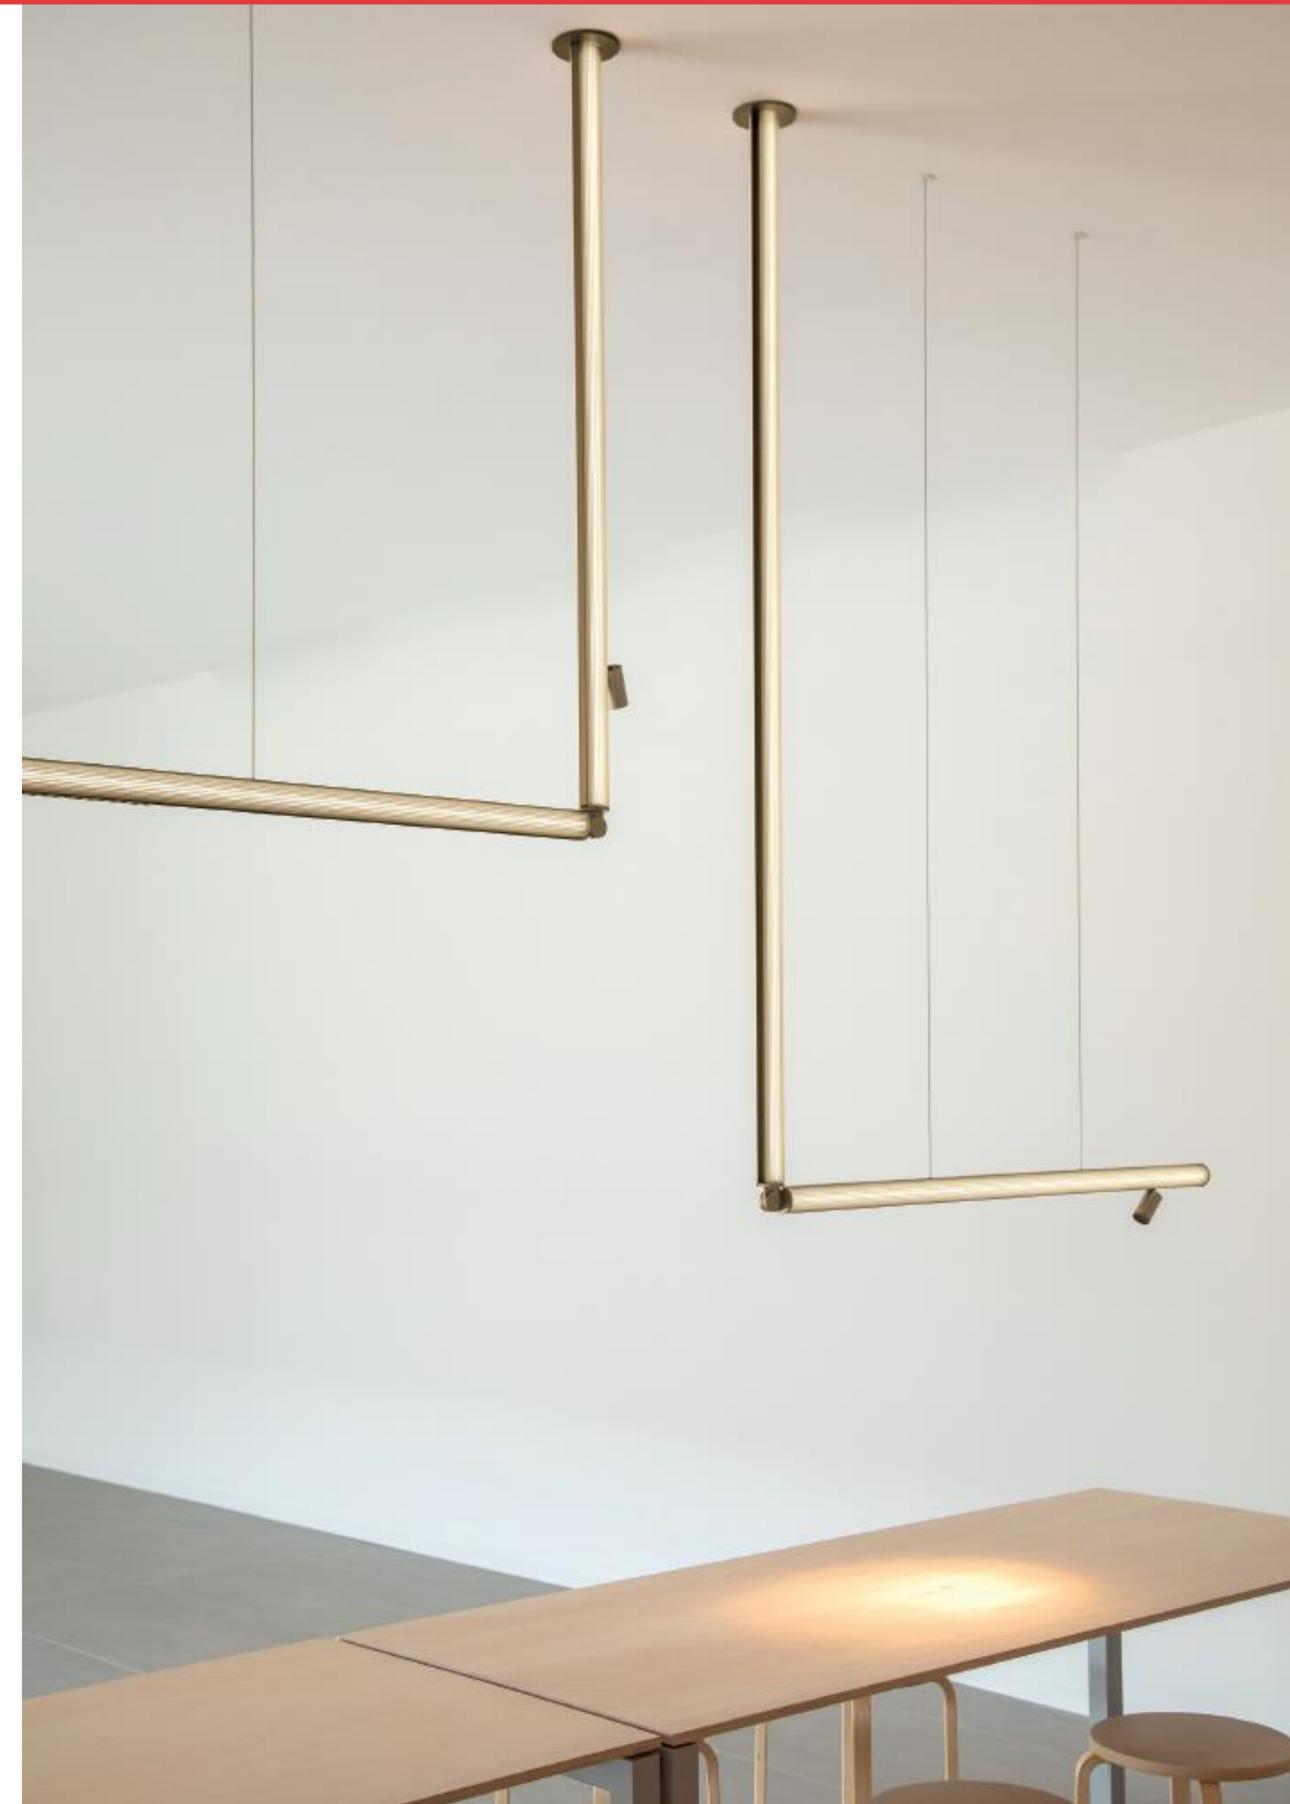



# Control options

Different control options for dimming The Glowing Track, all available for remote recessed or surface installation.


## Dali

Standard protocol for integration with any control system.


## Casambi

Track control through a dimmer device.

CASAMBI

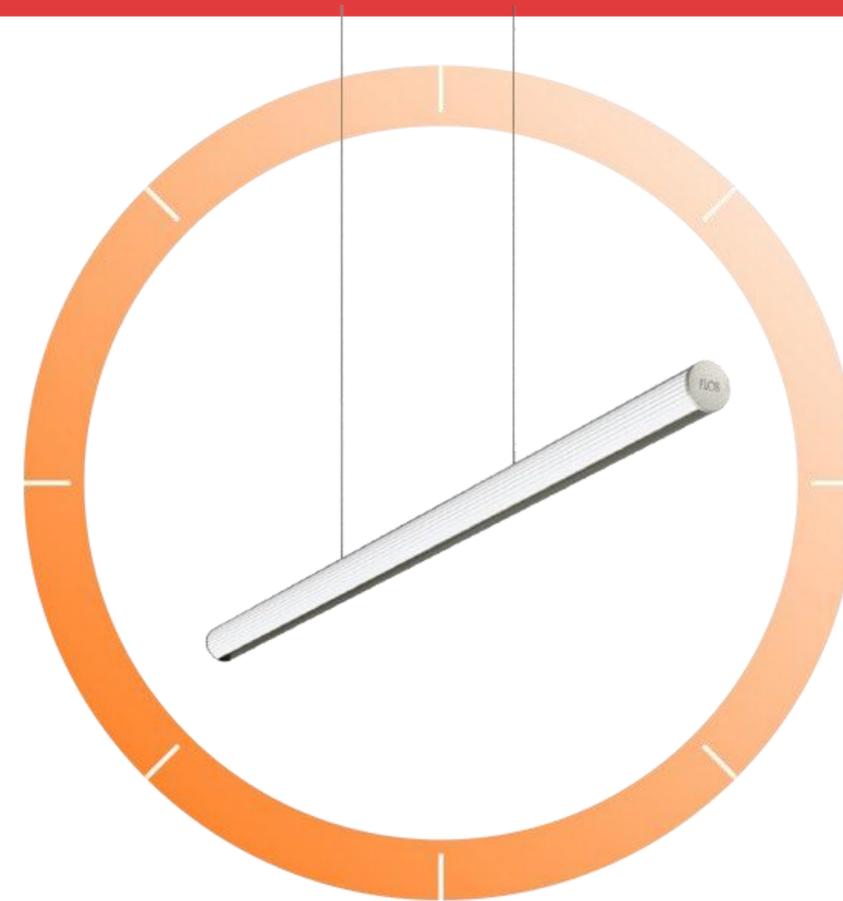

DALI

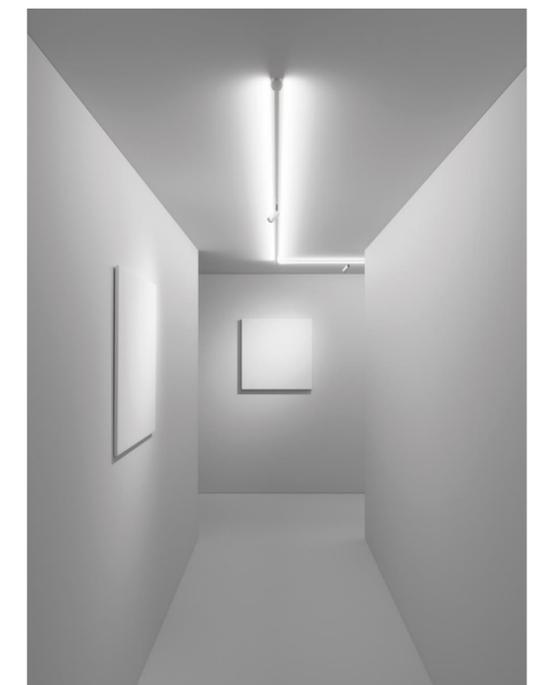



# Finishing

---

Available in an exclusive high-quality finish palette – White, Black, Bronze and Steel – the Glowing Track integrates seamlessly into high-end interiors, elevating the aesthetics of any space with quiet sophistication.

Track Finish



White



Black



Brushed Steel



Brushed Bronze

Spot Finish



White



Black



Brushed Steel



Brushed Bronze



## Lighting Fixtures

---


A wide range of projectors and accent lighting modules is available to meet any project requirements.



# Lighting Fixtures

## Flush Accent Light

Accent lighting modules can be fully recessed into the track, maintaining a uniform, refined aesthetic.

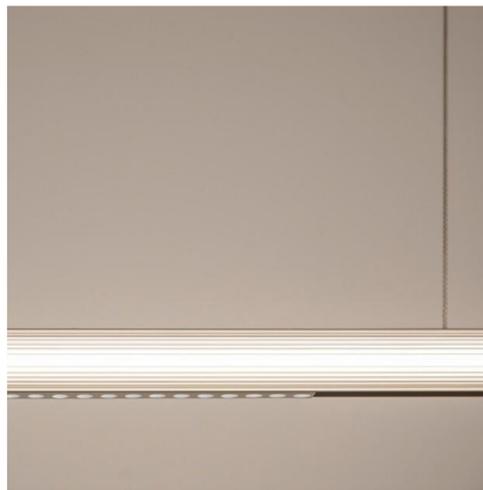

MULTI SPOT MINI






# Lighting Fixtures

## Spotlight Solution

The Glowing Track also accommodates compact projectors, offering even greater flexibility in lighting design.



SPOT

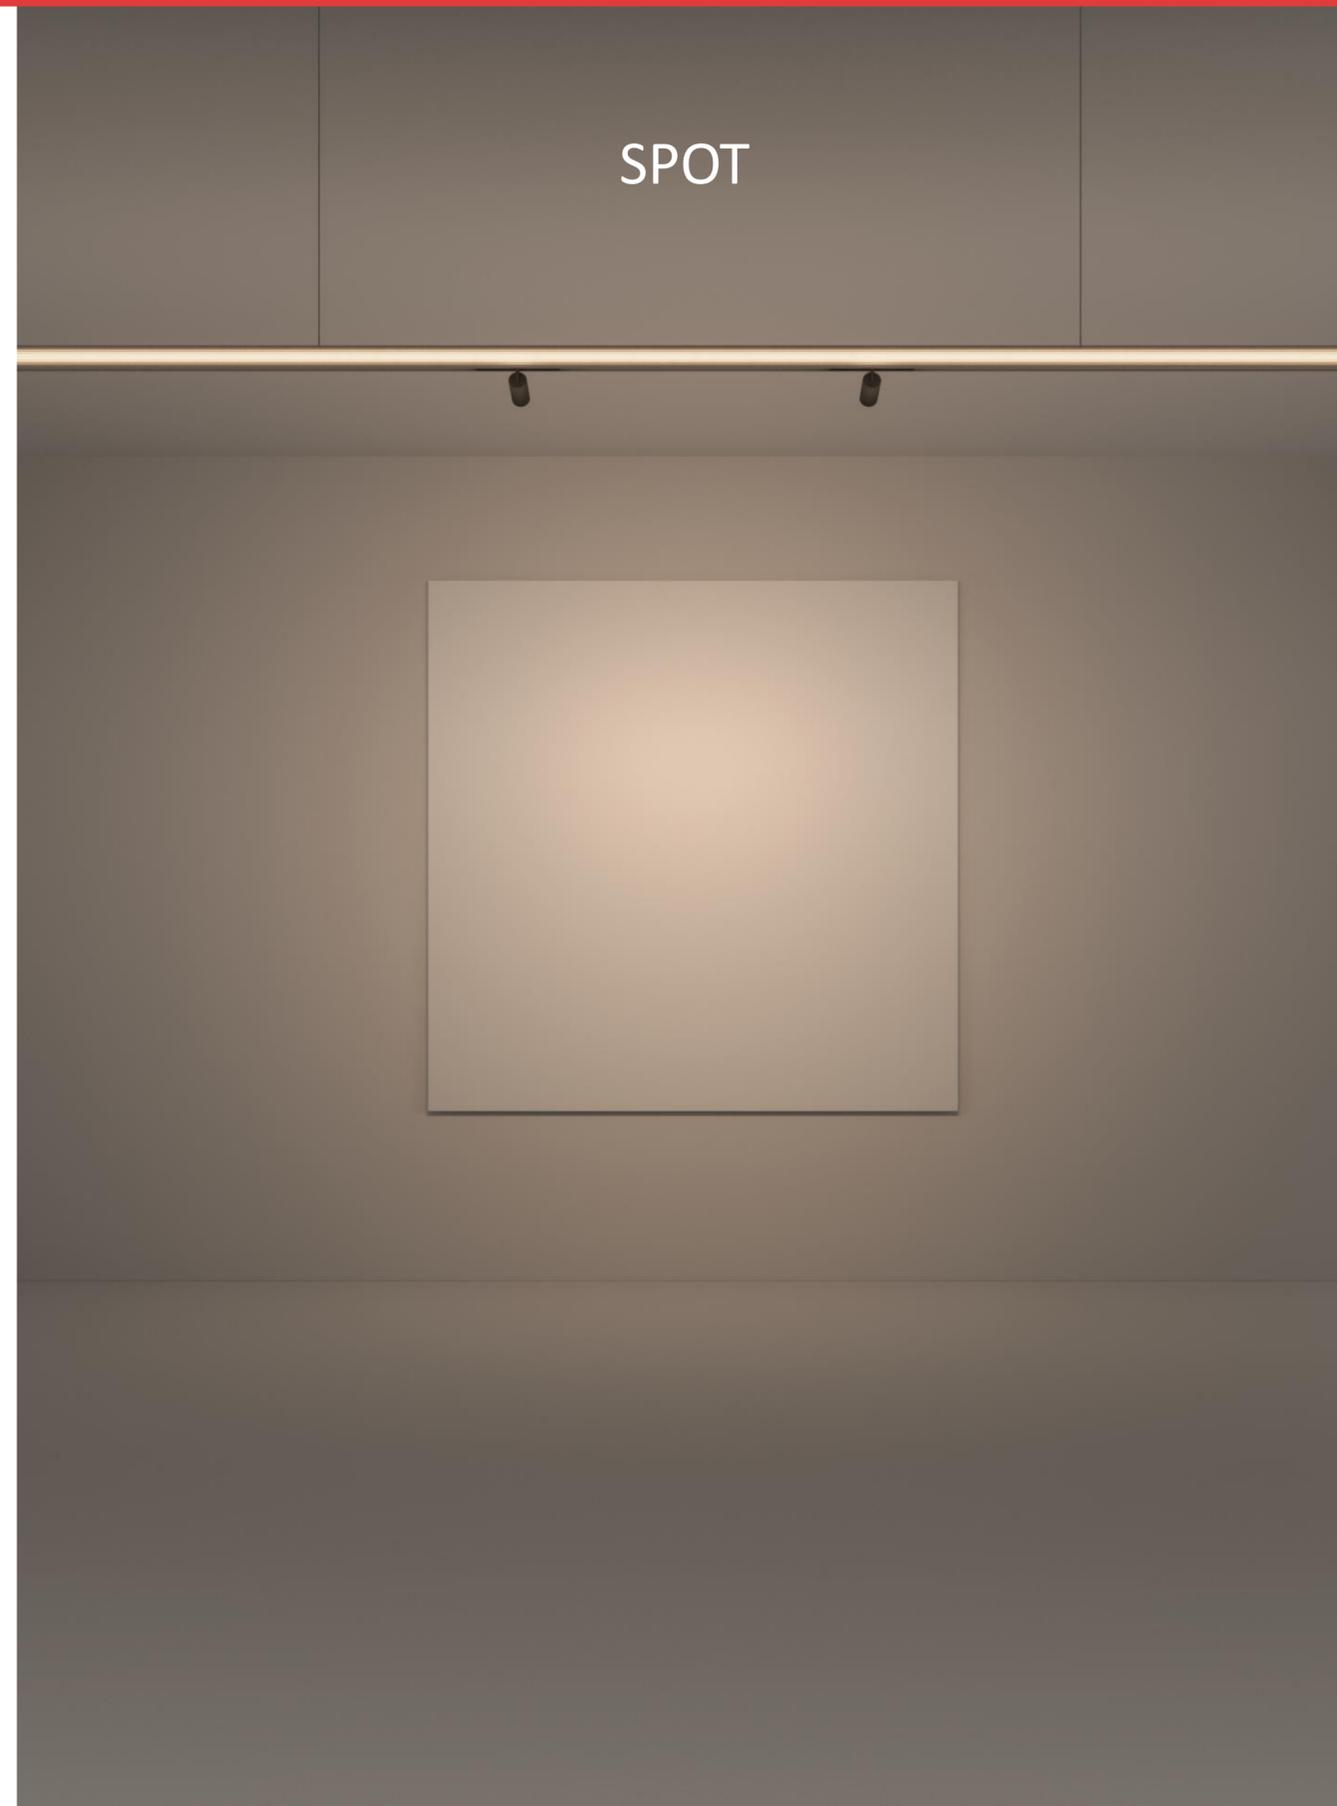



# Lighting Fixtures

---


## Spotlight Solution

Find Me



Designed by Jorge Herrera, available in three sizes (Find Me 0, 1 and 2).

Atom

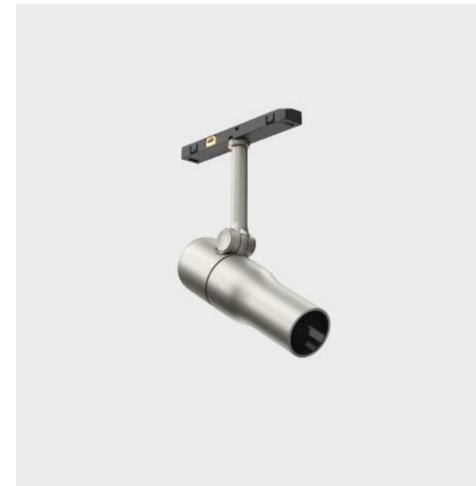

With the distinctive design flair of Piero Lissoni, Atom is a series of spotlights in two different sizes, perfect for accent lighting.

Light Shadow  
Spot



Thanks to the unique patented optical solution, Light Shadow Spot controls extreme cut-off angles without altering the high efficiency and incredible versatility of the product. Available in two sizes.



2

— Technical  
Data

Range offer

How to order





# Range Offer

## Suspension



### The Glowing Track Suspension

**Light Source:** Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

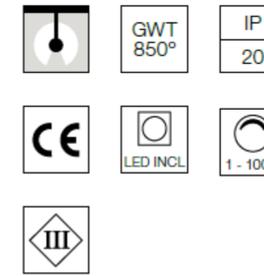
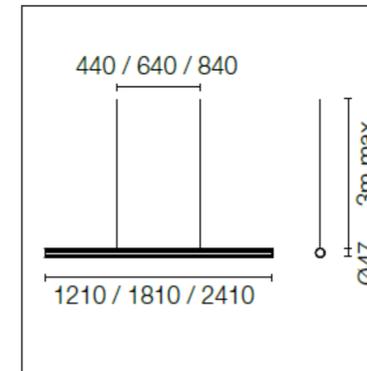


### The Glowing Track 360 Suspension

**Light Source:** Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

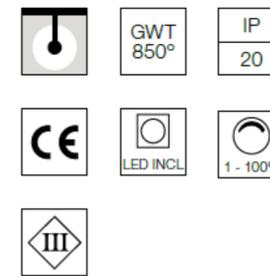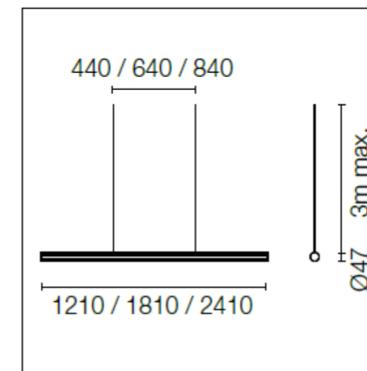

### The Glowing Track Blind Suspension

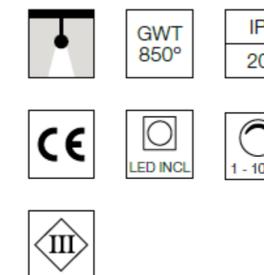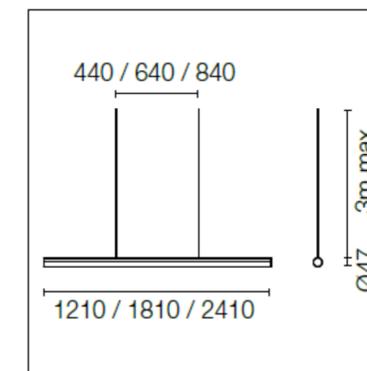




# Range Offer

Suspension  
Accessories

## Power Supplies


### Remote Power Supply Kit

Accessory kit for remote driver.  
Driver Included. 120W / 150W






### Surface Power Supply Kit

Accessory kit for surface driver.  
Driver Included. 150W.

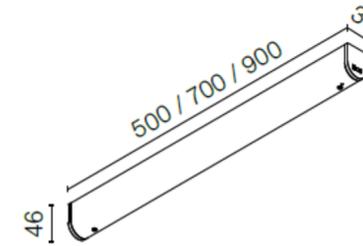

### Recessed Power Supply Kit

Accessory kit for recessed driver.  
Driver Included. 150W.

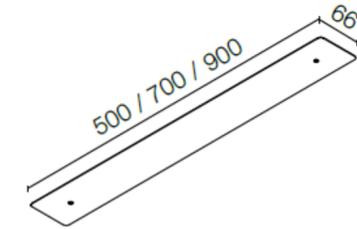

### Remote



### Surface



### Recessed






# Range Offer

## Suspension Accessories

## Connectors


### Linear Joint

Linear connection used to join components in a straight line.




### Corner Joint 2

90° corner connector used to join components in the horizontal and vertical plane.




### Corner Joint 3

Connector used to join three components at right angles



### Corner Joint 4

Connector used to join four components at right angles.






# Range Offer

## Surface with Remote Driver


### The Glowing Track Surface Remote Driver

**Light Source:** Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

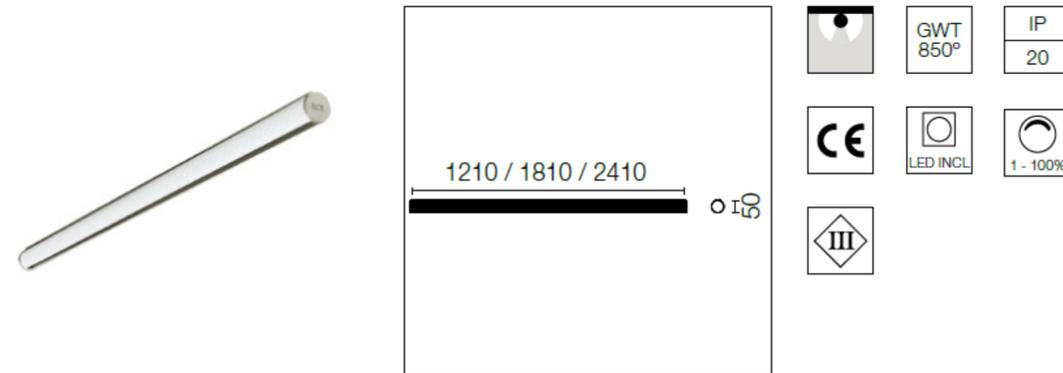


### The Glowing Track 360 Surface Remote Driver

**Light Source:** Top LED - L: 600 mm - 12,4W - 1232 lm - 2200K/CRI 90 / 1412 lm - 2700K/CRI 90 / 1484 lm - 3000K/CRI 90  
 L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

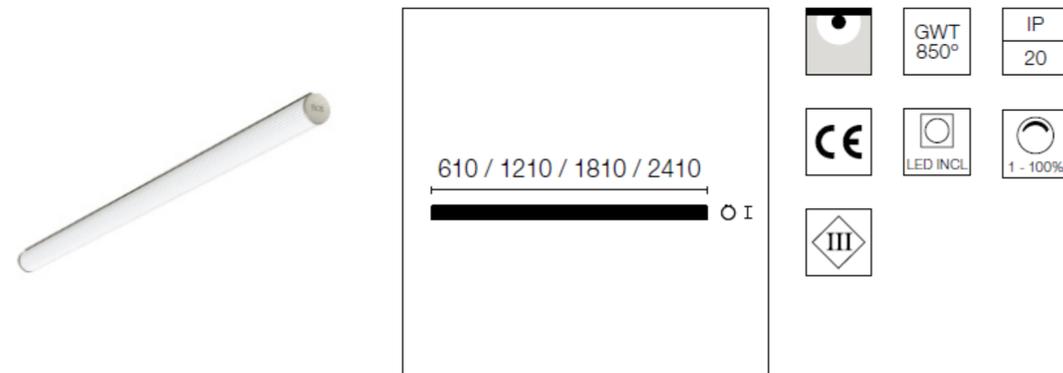

### The Glowing Track Blind Surface Remote Driver

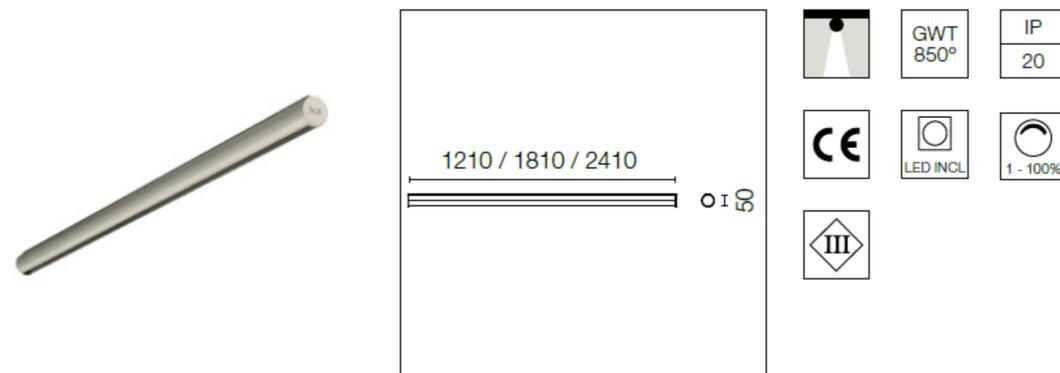




# Range Offer

## Surface with Remote Driver Accessories

### Connectors


#### Linear Joint

Linear connection used to join components in a straight line.




#### Corner Joint 2

90° corner connector used to join components in the horizontal and vertical plane.




#### Corner Joint 3

Connector used to join three components at right angles



#### Corner Joint 4

Connector used to join four components at right angles.




### Power Supplies


#### Drivers / Equipos

##### Remote Installation

Constant voltage power supply  
24V-60W No Dim.



Constant voltage power supply  
24V-120W No Dim.

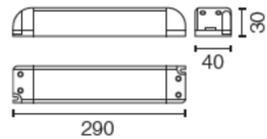

#### Ceiling / Wall Fixing Kit

Profile (mm)	Fixation points	Ceiling Kit to order
1200	3	2
1800	4	2
2400	4	2




→  
Range Offer

Surface Integrated Driver


The Glowing Track Surface Integrated Driver

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

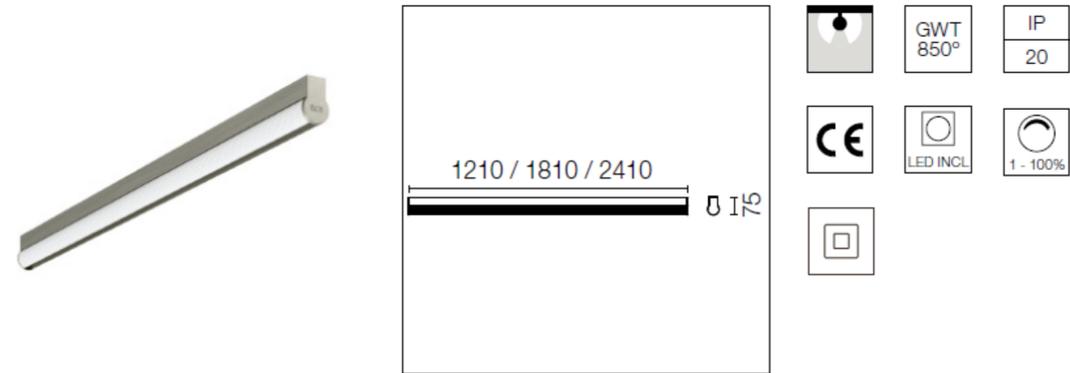


The Glowing Track 360 Surface Integrated Driver

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

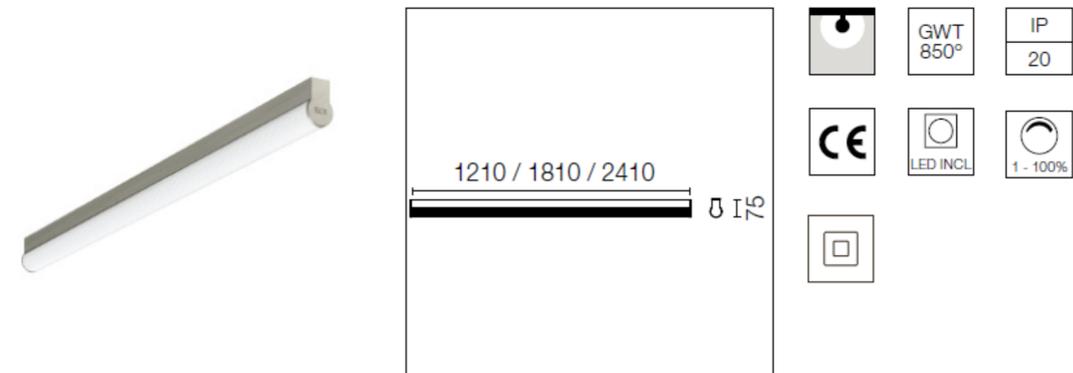

The Glowing Track Blind Surface Integrated Driver

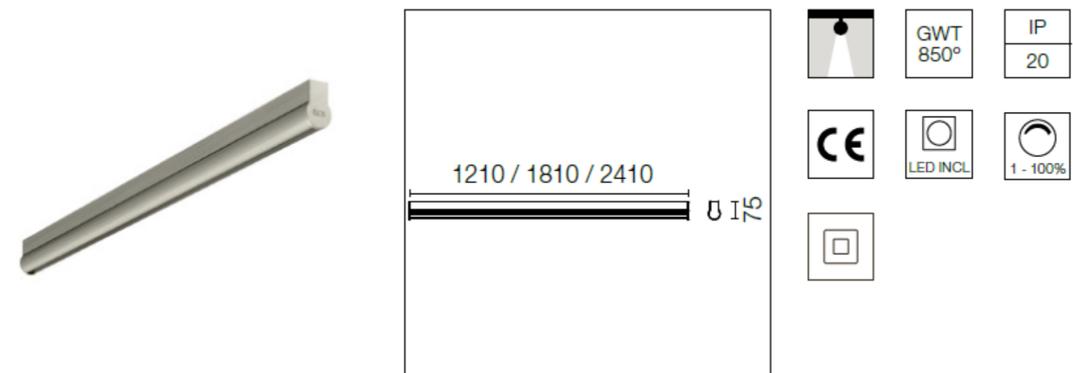



# Range Offer

## Surface Integrated Driver Accessories

### Connectors


#### Linear Joint

Linear connection used to join components in a straight line.




#### Corner Joint 2

90° corner connector used to join components in the horizontal and vertical plane.




#### Corner Joint 3

Connector used to join three components at right angles

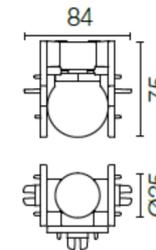

#### Corner Joint 4

Connector used to join four components at right angles.

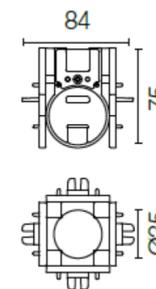

Ceiling / Wall Fixing Kit



Profile (mm)	Fixation points	Ceiling Kit to order
1200	3	2
1800	4	2
2400	4	2




# Range Offer

Surface + Wall PSU

## The Glowing Track Surface + Wall PSU

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90

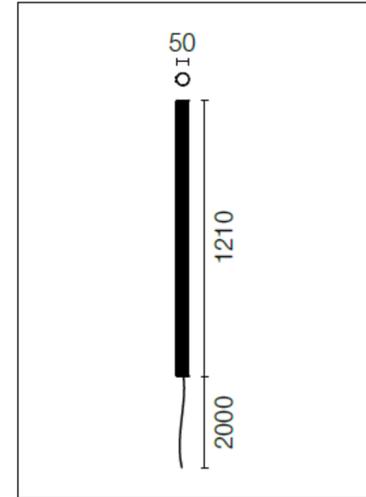

GWT  
850°

IP  
20




LED INCL

1 - 100%



## The Glowing Track 360 Surface + Wall PSU

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90

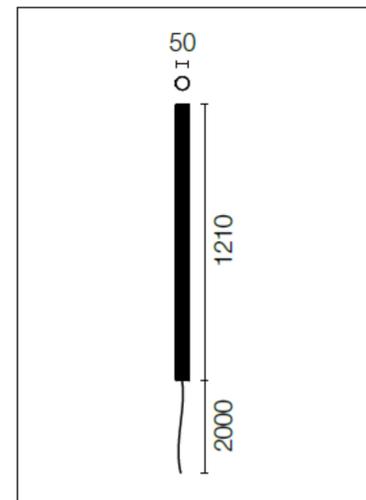

GWT  
850°

IP  
20



LED INCL

1 - 100%




→  
Range Offer

Vertical


The Glowing Track Vertical

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

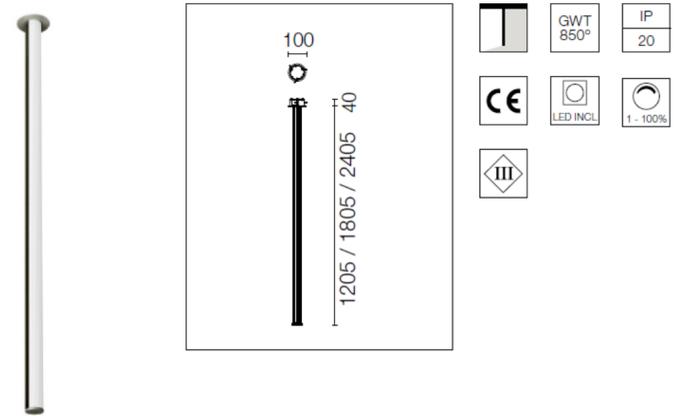


The Glowing Track 360 Vertical

Light Source: Top LED - L: 1200 mm - 24,8W - 2464 lm - 2200K/CRI 90 / 2824 lm - 2700K/CRI 90 / 2968 lm - 3000K/CRI 90  
 L: 1800 mm - 37,2W - 3696 lm - 2200K/CRI 90 / 4236 lm - 2700K/CRI 90 / 4452 lm - 3000K/CRI 90  
 L: 2400 mm - 49,6W - 4928 lm - 2200K/CRI 90 / 5648 lm - 2700K/CRI 90 / 5936 lm - 3000K/CRI 90

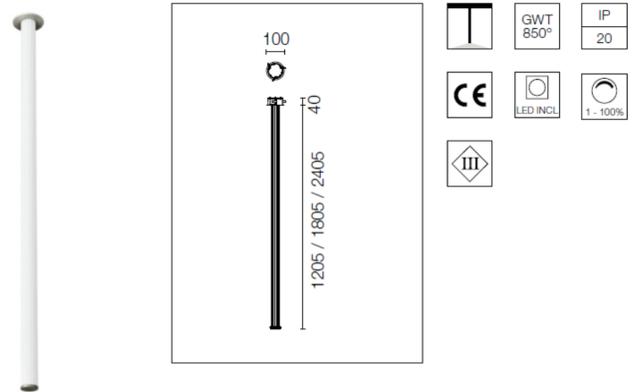

The Glowing Track Blind Vertical

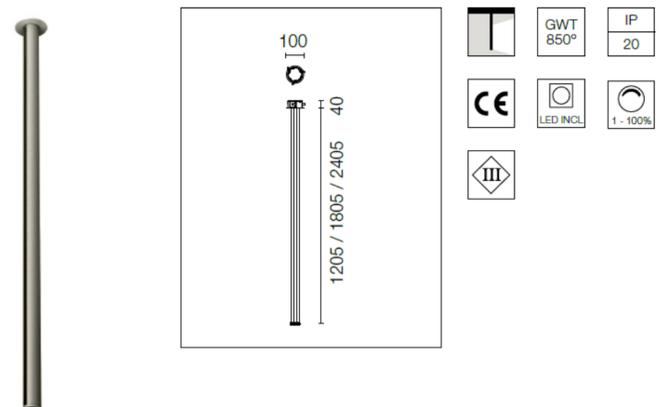




# Range Offer

Vertical  
Accessories

## Connectors

### Corner Joint 2

90° corner connector used to join components in the horizontal and vertical plane.




## Power Supplies


### Drivers / Equipos

Remote Installation

Constant voltage power supply  
24V-60W No Dim.



Constant voltage power supply  
24V-120W No Dim.

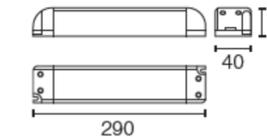


## Suspension, Vertical & Surface with Remote Driver



# Diagram

Application Example

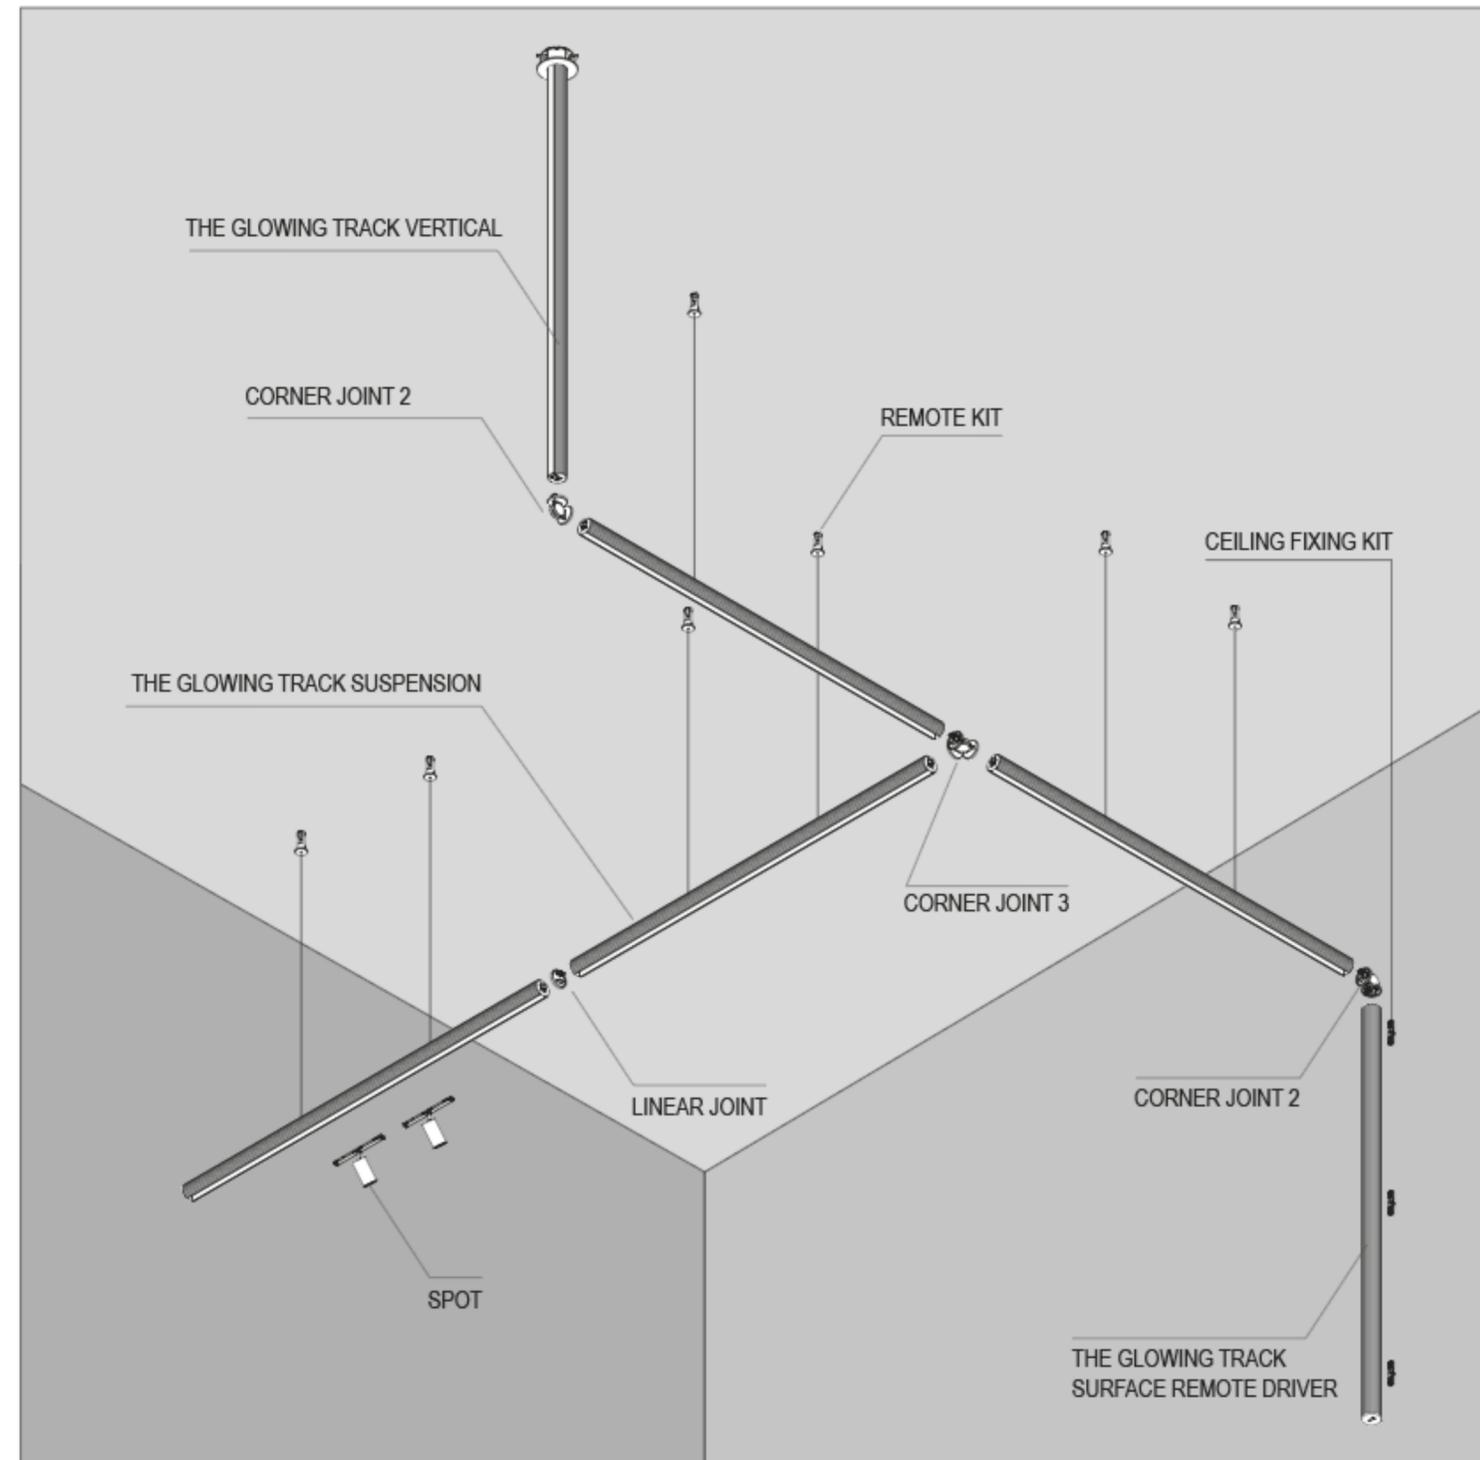


## Surface with Remote Driver



# Diagram

Application Example  
Surface

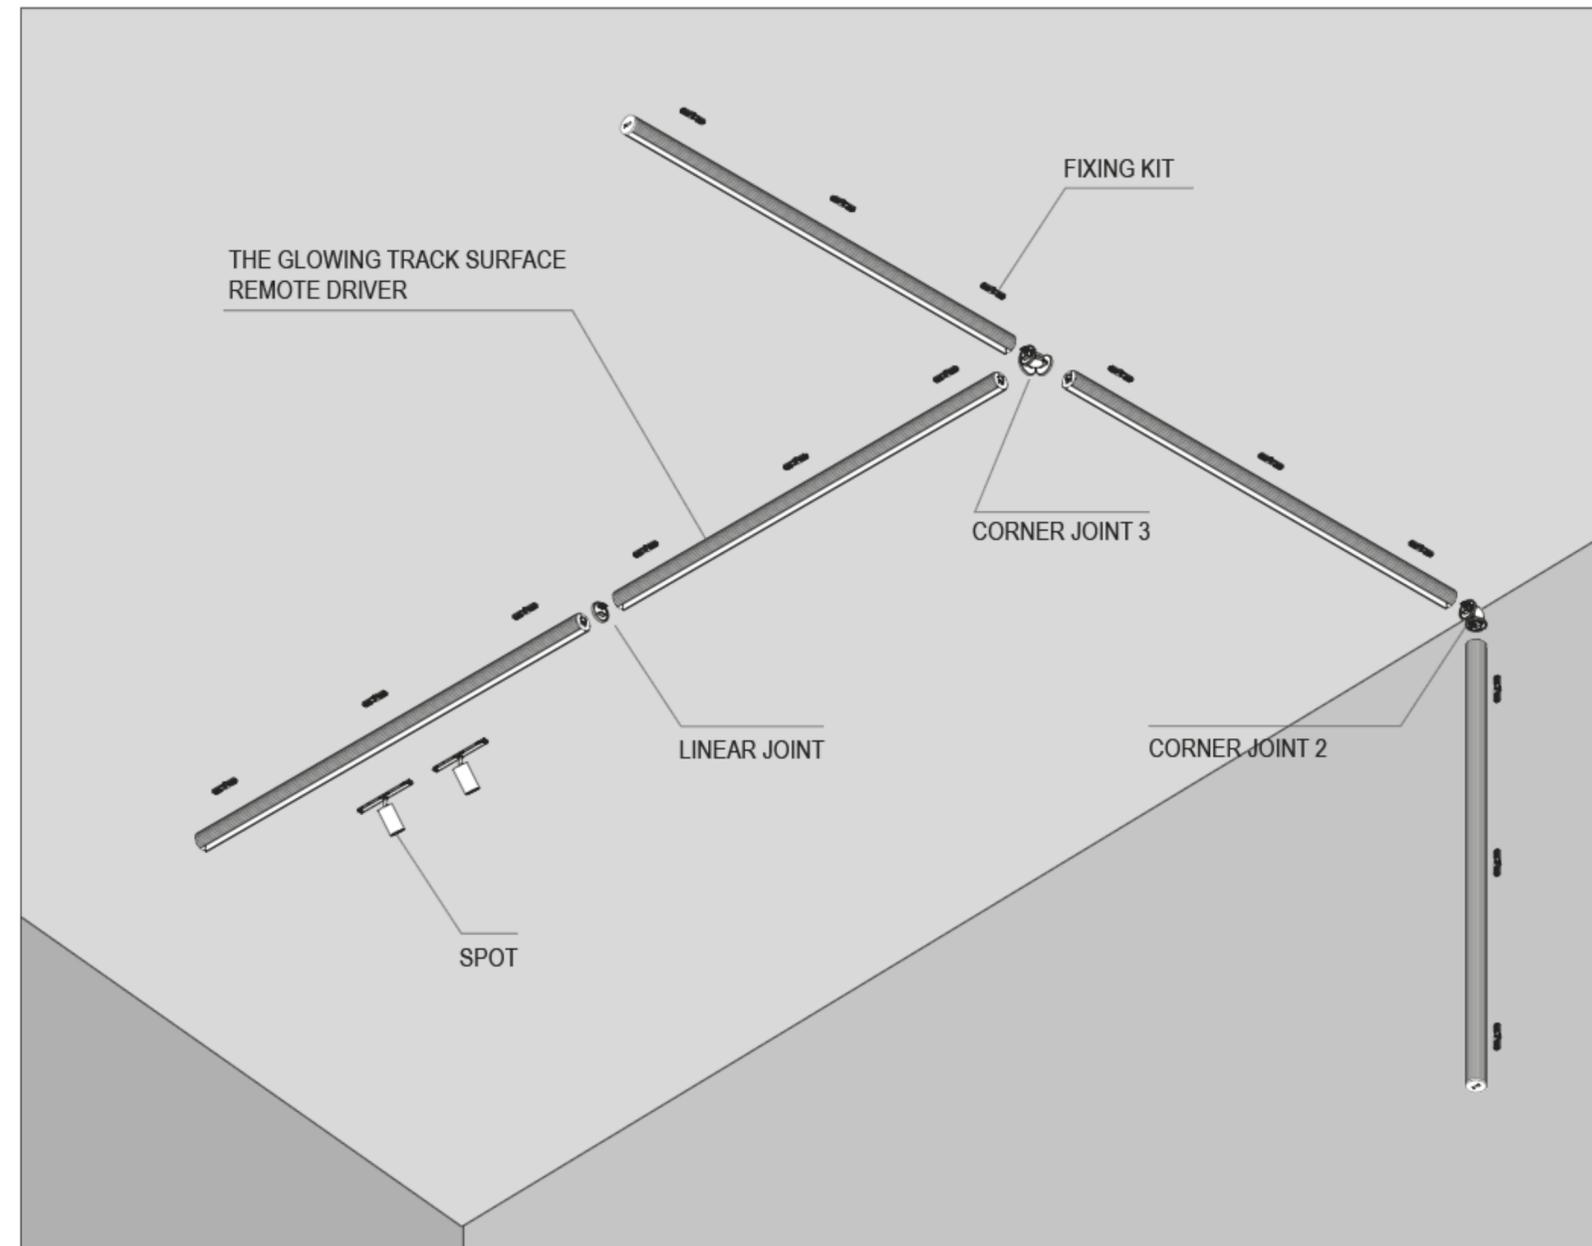



# Lighting Fixtures

## Technical Data

### LIGHTING MODULES

MULTI SPOT MINI



**LIGHT SOURCE**  
POWER LED  
7W  
635 lm  
2700K/CRI 90  
650 lm  
3000K/CRI 90

FIND ME 0



**LIGHT SOURCE**  
POWER LED  
3,5W  
300 lm  
2700K/CRI 90  
325 lm  
3000K/CRI 90

FIND ME 1



**LIGHT SOURCE**  
POWER LED  
5,5W  
450 lm  
2700K/CRI 90  
485 lm  
3000K/CRI 90

FIND ME 2



**LIGHT SOURCE**  
POWER LED  
10,5W  
650 lm  
2700K/CRI 90  
700 lm  
3000K/CRI 90

LIGHT SHADOW  
SPOT 30



**LIGHT SOURCE**  
POWER LED  
4,7W  
257 lm  
2700K/CRI 90  
263 lm  
3000K/CRI 90

LIGHT SHADOW  
SPOT 45



**LIGHT SOURCE**  
LED ARRAY  
11W  
799 lm  
2700K/CRI 90  
844 lm  
3000K/CRI 90

ATOM 90



**LIGHT SOURCE**  
POWER LED  
5,5W  
450 lm  
2700K/CRI 90  
485 lm  
3000K/CRI 90


ATOM 120



**LIGHT SOURCE**  
POWER LED  
8W  
635 lm  
2700K/CRI 90  
680 lm  
3000K/CRI 90

# How to order

1. Choose Profile & Length
2. Mounting Accessories
3. Power Supply
4. Light modules & Control

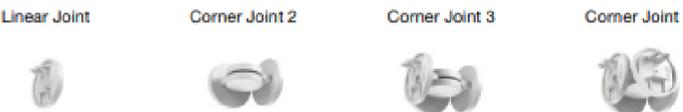1 CHOOSE YOUR PROFILE & LENGTH	2 COMPLETE WITH MOUNTING ACCESSORIES	3 SELECT POWER SUPPLY	4 SELECT A LIGHT MODULE AND CONTROL OPTION
<p><b>SUSPENSION PROFILES</b></p> <p>The Glowing Track Suspension</p>  <p>L: 1,2 / 1,8 / 2,2 m</p> <p>The Glowing Track Vertical</p>  <p>L: 1,2 / 1,8 / 2,2 m</p>	<p><b>Suspension</b></p> <p>Linear Joint    Corner Joint 2    Corner Joint 3    Corner Joint 4</p>  <p><b>Vertical</b></p> <p>Corner Joint 2</p> 	<p>Suspension</p>  <p>Remote Power Supply Kit</p>  <p>Surface Power Supply Kit</p>  <p>Recessed Power Supply Kit</p> <p><b>Surface Remote Driver &amp; Vertical Remote Installation Driver</b></p>	<p><b>No DIM / DALI</b></p> <p>Multi Spot Mini</p>  <p>S/MF</p> <hr/> <p>Light Shadow Spot 30    Light Shadow Spot 45</p>  <p>S/MF/WF    S/MF</p>
<p><b>SURFACE PROFILES</b></p> <p>The Glowing Track Surface Remote Driver</p>  <p>L: 0,6 / 1,2 / 1,8 / 2,2 m</p> <p>The Glowing Track Surface Integrated Driver</p>  <p>L: 1,2 / 1,8 / 2,2 m</p>	<p><b>Surface Remote Driver</b></p> <p>Linear Joint    Corner Joint 2    Corner Joint 3    Corner Joint 4</p>  <p><b>Surface Integrated Driver</b></p> <p>Linear Joint    Corner Joint 2    Corner Joint 3    Corner Joint 4</p>  <p><b>Fixed ceiling kit</b></p> 	<p>60W - 24V</p>  <p>120W - 24V</p>  <p><b>Surface Driver Integrated Power Supply Included</b></p>	<p><b>No DIM / DALI / Casambi</b></p> <p>Find Me 0    Find Me 1    Find Me 2</p>  <p>S/M    S/M    S/MF</p> <hr/> <p>Atom 90    Atom 120</p>  <p>S/M</p>



3

— Design

The concept

Reason why



# THE GLOWING TRACK

Modulating light in a different way

by Flos Architectural




# The concept

---

## A Modular System that Redefines Light

The Glowing Track is a modular lighting system designed to merge technology and poetry. It delivers fluid, immersive, and evolving light while integrating seamlessly into any space, revealing itself through the subtle presence of light rather than the object.



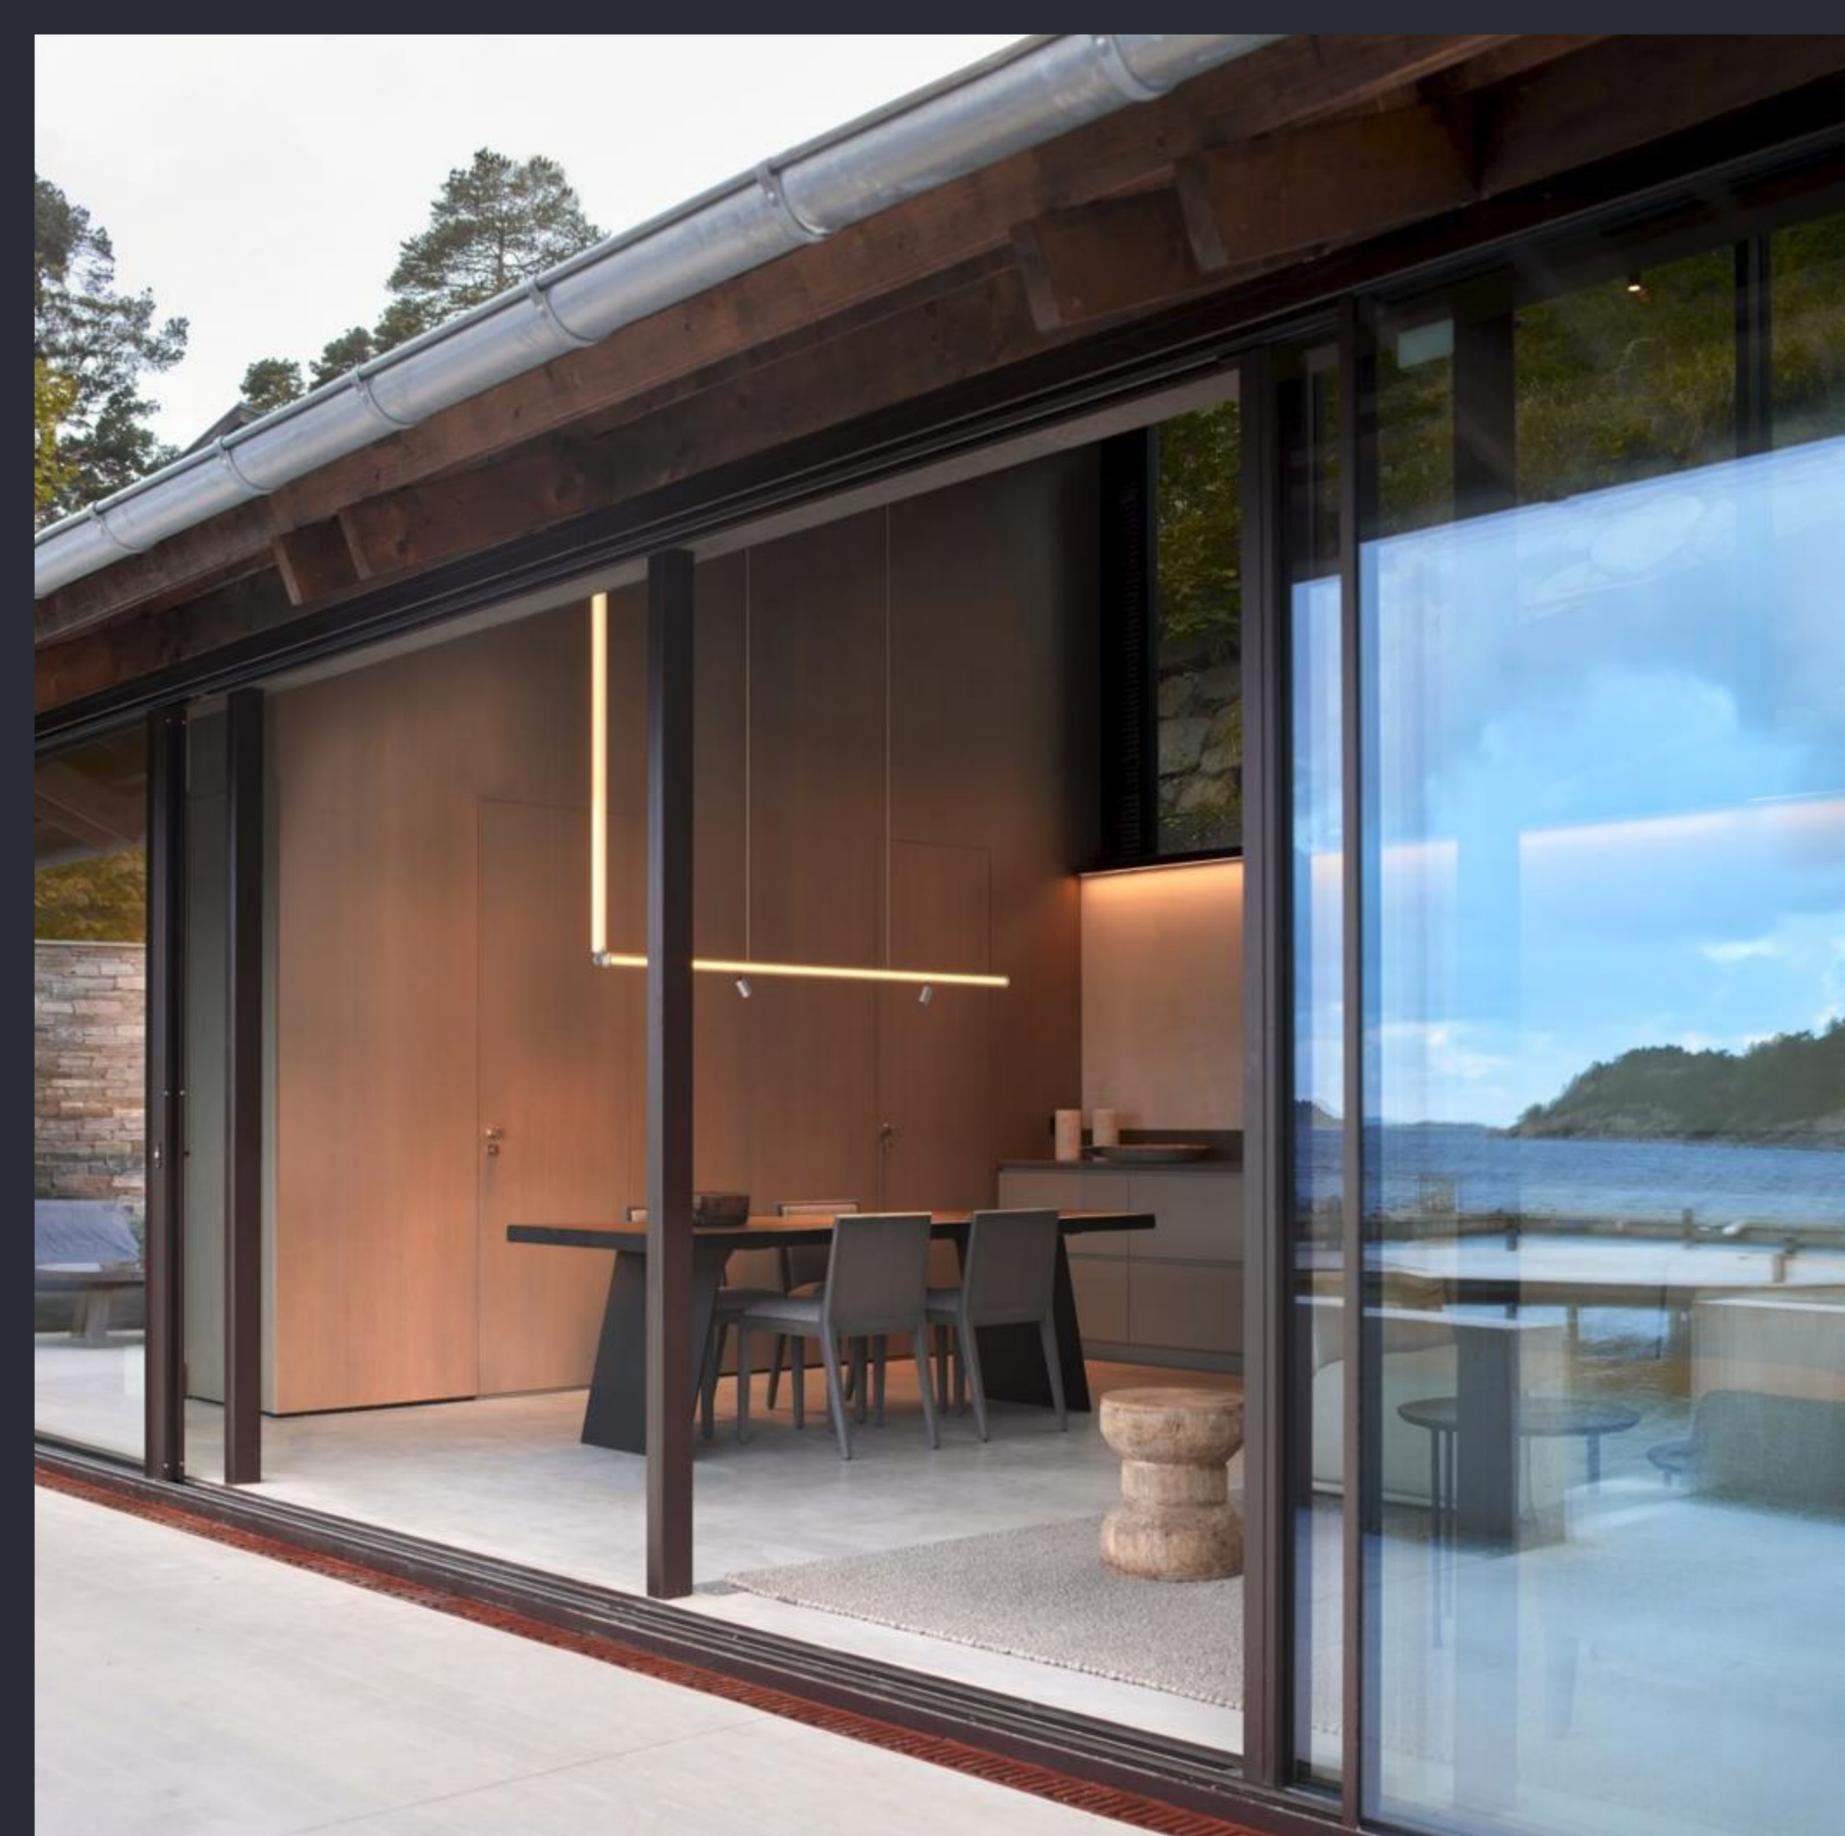

## Reason why

---

### **A Balance of Design, Performance, and Innovation**

Created to adapt effortlessly to spatial transformations, The Glowing Track combines technical precision, high performance, and minimalist aesthetics. It offers architects and designers a versatile tool to shape environments with both functional and emotional impact.

4

— Market

Applications



# Applications

---

**Residential:** flexible lighting for living rooms, kitchens, and lounge areas.

**Office:** functional and decorative lighting for modern workspaces.

**Retail:** product enhancement and atmospheric lighting for stores.

**Hospitality:** warm and inviting design for hotels, restaurants, and common areas.












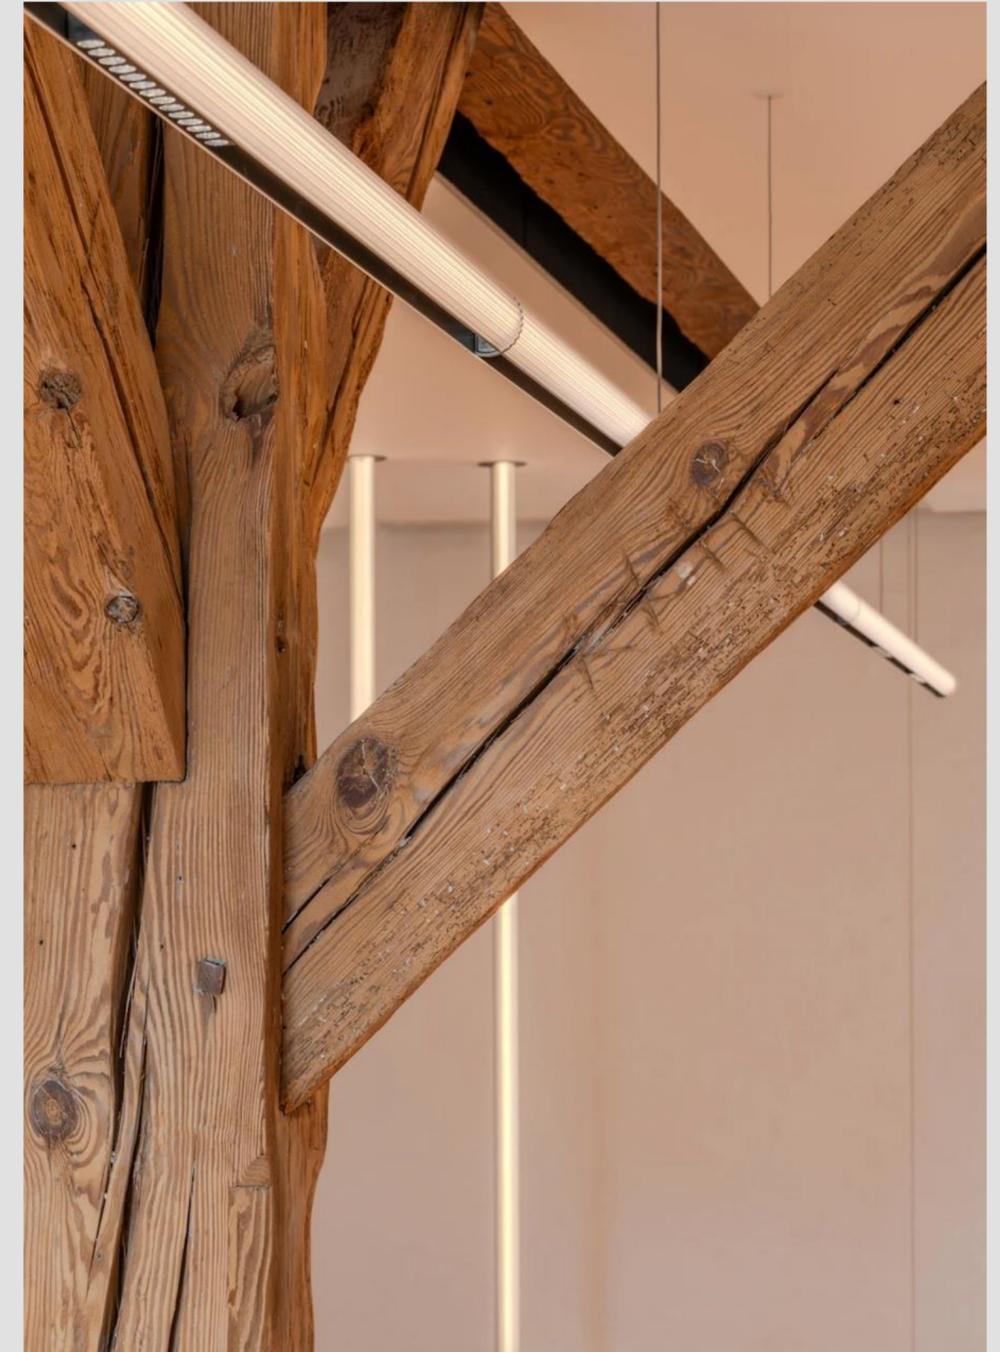

Flos Showroom Copenhagen



Euroluca Booth 2025

A photograph of a modern dining room. In the foreground, a long, dark wood dining table is set with several chairs. A long, glowing track light fixture hangs from the ceiling, illuminating the space. In the background, a kitchen island with a light-colored countertop and a wooden base is visible. The walls are a mix of wood paneling and concrete, and a window with light blue curtains is on the right.

Thanks

---

FLOS

THE GLOWING  
TRACK

Designed by  
Flos Architectural